

# T-Handle Aluminum Gripper®




## T-Handle Aluminum Gripper® Plug Features:

- Ideal for long-term applications
- 6" - 12" plugs are sized for concrete, clay, and SDR 26 and 35 pipe
- 15" and 18" plugs are sized for concrete and clay pipe sizes only
- Available with or without bypass
- Can be used for sewer air pressure tests

## Equipped with:

- Heavy-duty aluminum body and T-handle
- Chemical-resistant neoprene o-ring

## Line Acceptance Test

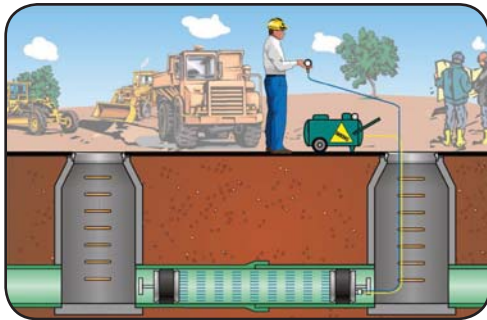

Part #	Nominal Size	Size Usage Range		Maximum Allowable Back Pressure		Product Specifications		
		Minimum Diameter	Maximum Diameter	Air Pressure PSI*	Head Pressure (Feet of Head)	Product Length	Product Weight	Bypass Diameter (M NPT)
<b>T-Handle Aluminum Gripper® Plugs (non-bypass)</b>								
272892	6" (150 mm)	5.7" (144 mm)	6.3" (160 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	6 lbs (2.7 kg)	N/A
272906	8" (200 mm)	7.7" (196 mm)	8.3" (211 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	9 lbs (4.1 kg)	N/A
272914	10" (250 mm)	9.8" (248 mm)	10.3" (262 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	12 lbs (5.4 kg)	N/A
272922	12" (300 mm)	11.7" (297 mm)	12.3" (312 mm)	13 (0,9 bar)	30 (9.1 M)	9.7" (247 mm)	15.5 lbs (7 kg)	N/A
272930*	15" (380 mm)	14.8" (377 mm)	15.3" (388 mm)	13 (0,9 bar)	30 (9.1 M)	9.7" (247 mm)	23 lbs (10.4 kg)	N/A
272888*	18" (460 mm)	17.7" (450 mm)	18.3" (465 mm)	8.7 (0,61 bar)	20 (6.1 M)	9.7" (247 mm)	30 lbs (13.6 kg)	N/A
<b>T-Handle Gripper® Plugs (with bypass)</b>								
272949	6" (150 mm)	5.7" (144 mm)	6.3" (160 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	6.5 lbs (3 kg)	¼"
272957	8" (200 mm)	7.7" (196 mm)	8.3" (211 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	9.5 lbs (4.3 kg)	¾"
272965	10" (250 mm)	9.8" (248 mm)	10.3" (262 mm)	17 (1,2 bar)	40 (12 M)	9.7" (247 mm)	12.5 lbs (5.7 kg)	¾"
272973	12" (300 mm)	11.7" (297 mm)	12.3" (312 mm)	13 (0,9 bar)	30 (9.1 M)	9.7" (247 mm)	16 lbs (7.3 kg)	¾"
272981*	15" (380 mm)	14.8" (377 mm)	15.3" (388 mm)	13 (0,9 bar)	30 (9.1 M)	9.7" (247 mm)	24 lbs (10.7 kg)	¾"
272998*	18" (460 mm)	17.7" (450 mm)	18.3" (465 mm)	8.7 (0,61 bar)	20 (6.1 M)	9.7" (247 mm)	31 lbs (14 kg)	¾"

\* Sized for concrete and clay pipe only.

\* Always block plugs when conducting air tests!